

2-Ethylhexanol Pro 25

2-Ethylhexanol with 25% certified renewable carbon content

Product Description

2-Ethylhexanol Pro is a renewable drop-in replacement for 2-Ethylhexanol, ready to be used in existing formulations. Based on a traceable mass balance concept, this Pro-Environment product is designed to reduce the carbon footprint throughout the value chain and to support sustainable sourcing of renewable and recycled raw materials.

2-Ethylhexanol Pro has 25% renewable carbon content and carries the ISCC PLUS certification. This ensures that raw materials used are sourced responsibly and sustainably from cradle to gate. The certification includes a calculation of greenhouse gas values.


2-Ethylhexanol is widely used in the production of dioctyl phthalates in vinyl applications, acrylates and 2-ethylhexyl nitrate as cetane number improver. It has one primary hydroxyl group. It is a colorless liquid soluble in most organic solvents.

Segment Applications

Dioctyl phthalate, Acrylates, 2-ethylhexyl nitrate, Lubrication oil additives, mining chemicals, special plasticizers, herbicides, ester oils (non-vinyl)

Delivery Forms

Liquid in bulk containers, 195 kg drums, 835 kg IBCs, Iso Containers, Flexi Containers

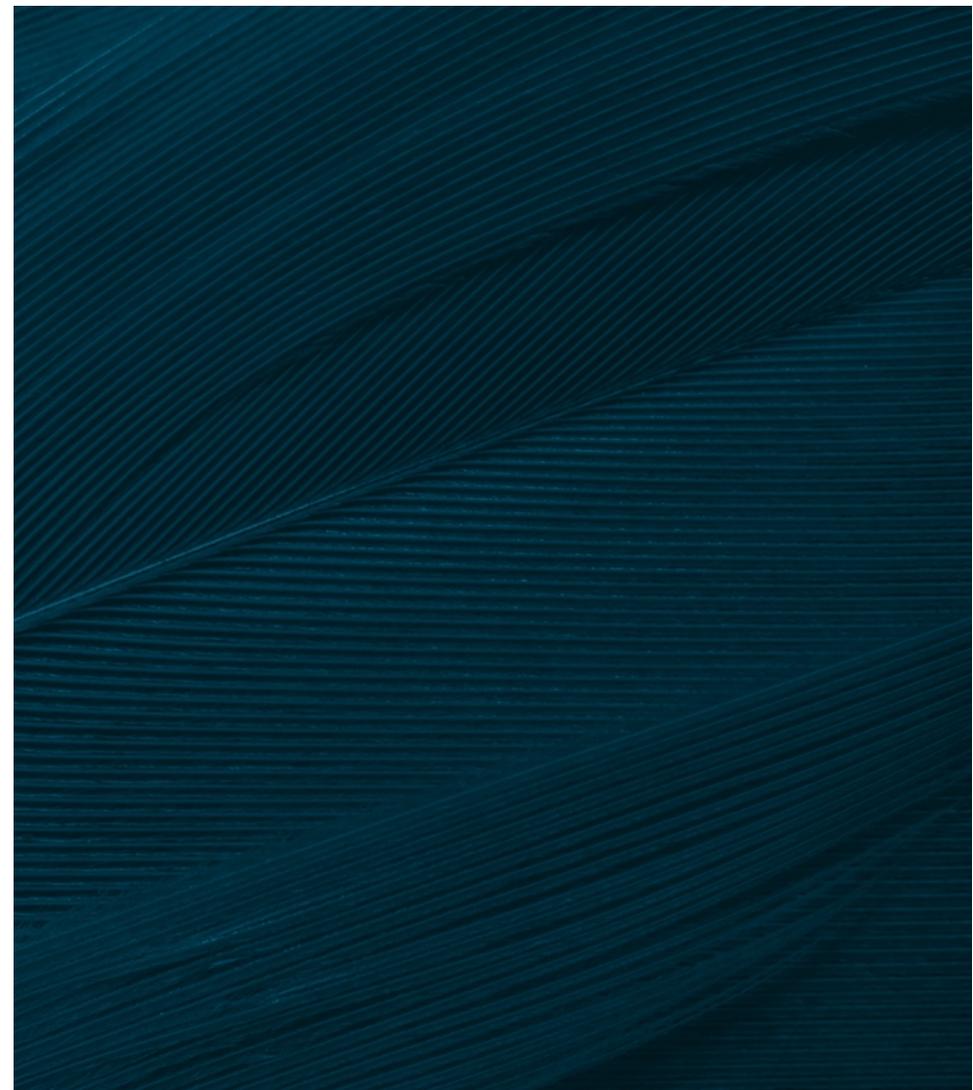

2-Ethylhexanol Pro 25

2-Ethylhexanol with 25% certified renewable carbon content

Sales Specification

Characteristics	Unit	Specification	Analytical Method
Color	Hazen	Max. 5	ISO 2211- ASTM 1209
Purity (as water-free)	%	Min. 99.6	GC
Water content	wt.%	Max. 0.05	ASTM E 1064
Acidity (as acetic acid)	wt.%	Max. 0.002	ISO 1385/IV- ASTM D 1613
2-Ethylhexanal	ppm	Max. 200	GC

General Characteristics

Characteristics	Unit	Typical Value ¹
Molecular weight	g/mol	130.2
Boiling range	°C	183-186
Density at 20°C	kg/m ³	832-833

1. Typical values are for information only and not part of sales specification

Pro-Environment Information

Renewable carbon content is 25% based on mass balance concept.

PCF* Including Biogenic CO₂ Uptake: 1.0 kg CO₂eq/kg product
Biogenic CO₂ Uptake: 0.7 kg CO₂/kg product

*Cradle-to-Gate value

All PCF values are calculated based on ISCC, Together for Sustainability, and GHG protocol methodology. The PCF value stated above is updated on a yearly basis, actual values may differ over the year and are stated in the sustainability declaration document. This product is ISCC PLUS certified.

Handling and Storage

Perstorp recommends storing 2-Ethylhexanol in stainless steel or aluminum containers. Storage under a nitrogen atmosphere is recommended. The maximum storage temperature has not been determined, but when stored as recommended temperatures up to 40°C should present no problem.

HS No.: 2905 16
CAS No.: 104-76-7
REACH registration No. 01-2119487289-20-0003



Effective date: March 20, 2024

USERS ARE ADVISED TO MAKE THEIR OWN INDEPENDENT DETERMINATION OF THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE. EXCEPT FOR WHAT IS STATED IN PERSTORP'S GENERAL CONDITIONS OF SALE OR SEPARATELY IN A WRITTEN CONTRACT WITH PERSTORP, NO INFORMATION PROVIDED IN THIS DATA SHEET CONSTITUTES A WARRANTY (EXPRESS OR IMPLIED) BY PERSTORP, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.